UNIVERGE

NEC

MM0009/0304
issue 1.1

UNIVERGE NEAX 2000 IPS
INTERNET PROTOCOL SERVER

General Description

JANUARY, 2006

NEC Corporation

LIABILITY DISCLAIMER

NEC Corporation reserves the right to change the specifications, functions, or features, at any time, without notice.

NEC Corporation has prepared this document for use by its employees and customers. The information contained herein is the property of NEC Corporation and shall not be reproduced without prior written approval from NEC Corporation.

UNIVERGE, NEAX and D^{term} are registered trademarks or trademarks to be registered of NEC Corporation.

Copyright 2005-2006

NEC Corporation

Printed in Japan.

All other brand or product names are or may be trademarks or registered trademarks of, and are used to identify products or services of their respective owners.

NEAX 2000 IPS
General Description

TABLE OF CONTENTS

Page

CHAPTER 1 INTRODUCTION 1
UNIVERGE Architecture 1
System Overview 3
Hardware Architecture 6
Software Architecture 8
Technical Terms 9
Trunking Diagram 10

CHAPTER 2 SYSTEM CONFIGURATION 11
Module Configuration 11
Installation Methods 12
Modules and Installation Hardware 15
Circuit Cards 16
System Conditions 16

CHAPTER 3 TERMINALS 18
Desk Console 19
Figures of D^{term} Series i/D^{term} IP 23
Wireless System 29
D^{term} Softphone (SP30) 37
Subpanels and Functions 38

CHAPTER 4 OVERVIEW OF INSTALLATION AND MAINTENANCE 39
Installation 39
Maintenance 40

CHAPTER 5 SPECIFICATIONS 41
System Capacity 41
IP Specifications 44
Line Conditions 46
Cell Station/Zone Transceiver Line Conditions 47
Traffic Capacity 47
DRS (Device Registration Server) 47
Dimension and Weight 48
Operating Environment 48

LIST OF ILLUSTRATIONS

Figure	Title	Page
Figure 1-1	NEAX 2000 IPS	3
Figure 1-2	NEAX 2000 IPS System Overview	4
Figure 1-3	Example of Network Configuration of Remote PIM over IP	5
Figure 1-4	Trunking Diagram of NEAX 2000 IPS	10
Figure 2-1	Module Configuration of NEAX 2000 IPS	11
Figure 2-2	Face Layout of NEAX 2000 IPS	12
Figure 2-3	Wall-mounting of PIM	13
Figure 2-4	19-inch Rack-mounting	14
Figure 3-1	DESK Console	19
Figure 3-2	D^{term} 2 (White)	23
Figure 3-3	D^{term} 4D (Black)	23
Figure 3-4	D^{term} 8 (White)	23
Figure 3-5	D^{term} 8D (White)	24
Figure 3-6	D^{term} 16D (White)	24
Figure 3-7	D^{term} 32D (White)	24
Figure 3-8	DSS Console (Black)	25
Figure 3-9	D^{term} 16LD (Black)	25
Figure 3-10	Analog Port Adapter (APR)	25
Figure 3-11	Ancillary Device Adapter (ADA)	26
Figure 3-12	Computer Telephony Adapter (CTA-R)	26
Figure 3-13	IP Adapter (IP-R)	26
Figure 3-14	System Configuration of Wireless Communications	30
Figure 3-15	Cell Station (CS) and PHS Personal Station (PS)	33
Figure 3-16	Zone Transceiver (ZT) and PCS Personal Station (PS)	36
Figure 3-17	SP30 Screen	37

LIST OF TABLES

Table	Title	Page
Table 1-1	Technical Terms of NEAX 2000 IPS System	9
Table 2-1	Modules of NEAX 2000 IPS System	15
Table 3-1	D^{term} Series i/D^{term} IP Specifications and Accessories	27
Table 3-2	Combination Pattern of Optional Accessories to the D^{term} Series i/ D^{term} IP	28
Table 3-3	PHS Personal Station (PS) Specifications	31
Table 3-4	2-Wired (U-Interface) Cell Station (CS) Specifications	32
Table 3-5	PCS Personal Station (PS) Specifications	34
Table 3-6	Zone Transceiver (ZT) Specifications	35
Table 5-1	System Capacity (Single MP System)	41
Table 5-2	IP Specifications	44
Table 5-3	Line Conditions	46
Table 5-4	Cell Station/Zone Transceiver Line Conditions	47
Table 5-5	Traffic Capacity	47
Table 5-6	DRS (Device Registration Server)-System Based	47
Table 5-7	Dimension and Weight	48
Table 5-8	Operating Environment	48

CHAPTER 1 INTRODUCTION

UNIVERGE Architecture

UNIVERGE™ is NEC's IP architecture for unifying multimedia networks while enabling robust business solutions. UNIVERGE is an open and standards-based IP architecture, ensuring interoperability with other broadband media, IT equipment and business applications. It also enables seamless and mobile communication in a multi-network environment.

Built upon NEC's 100-year tradition of quality and reliable communication technology, UNIVERGE offers customers the flexibility and scalability to deploy the IP communications and applications they need without compromising on quality, features and functionalities.
NEC will create new business solutions on this UNIVERGE architecture such as new communications by IP Telephony / softphone or by Video Conference and integrated management system both for business applications and communication equipments.

* The name UNIVERGE is a combination of "universal" and "convergence", and refers to an NEC initiative to create and take to the world new value-added products developed by integrating information technology and networks.

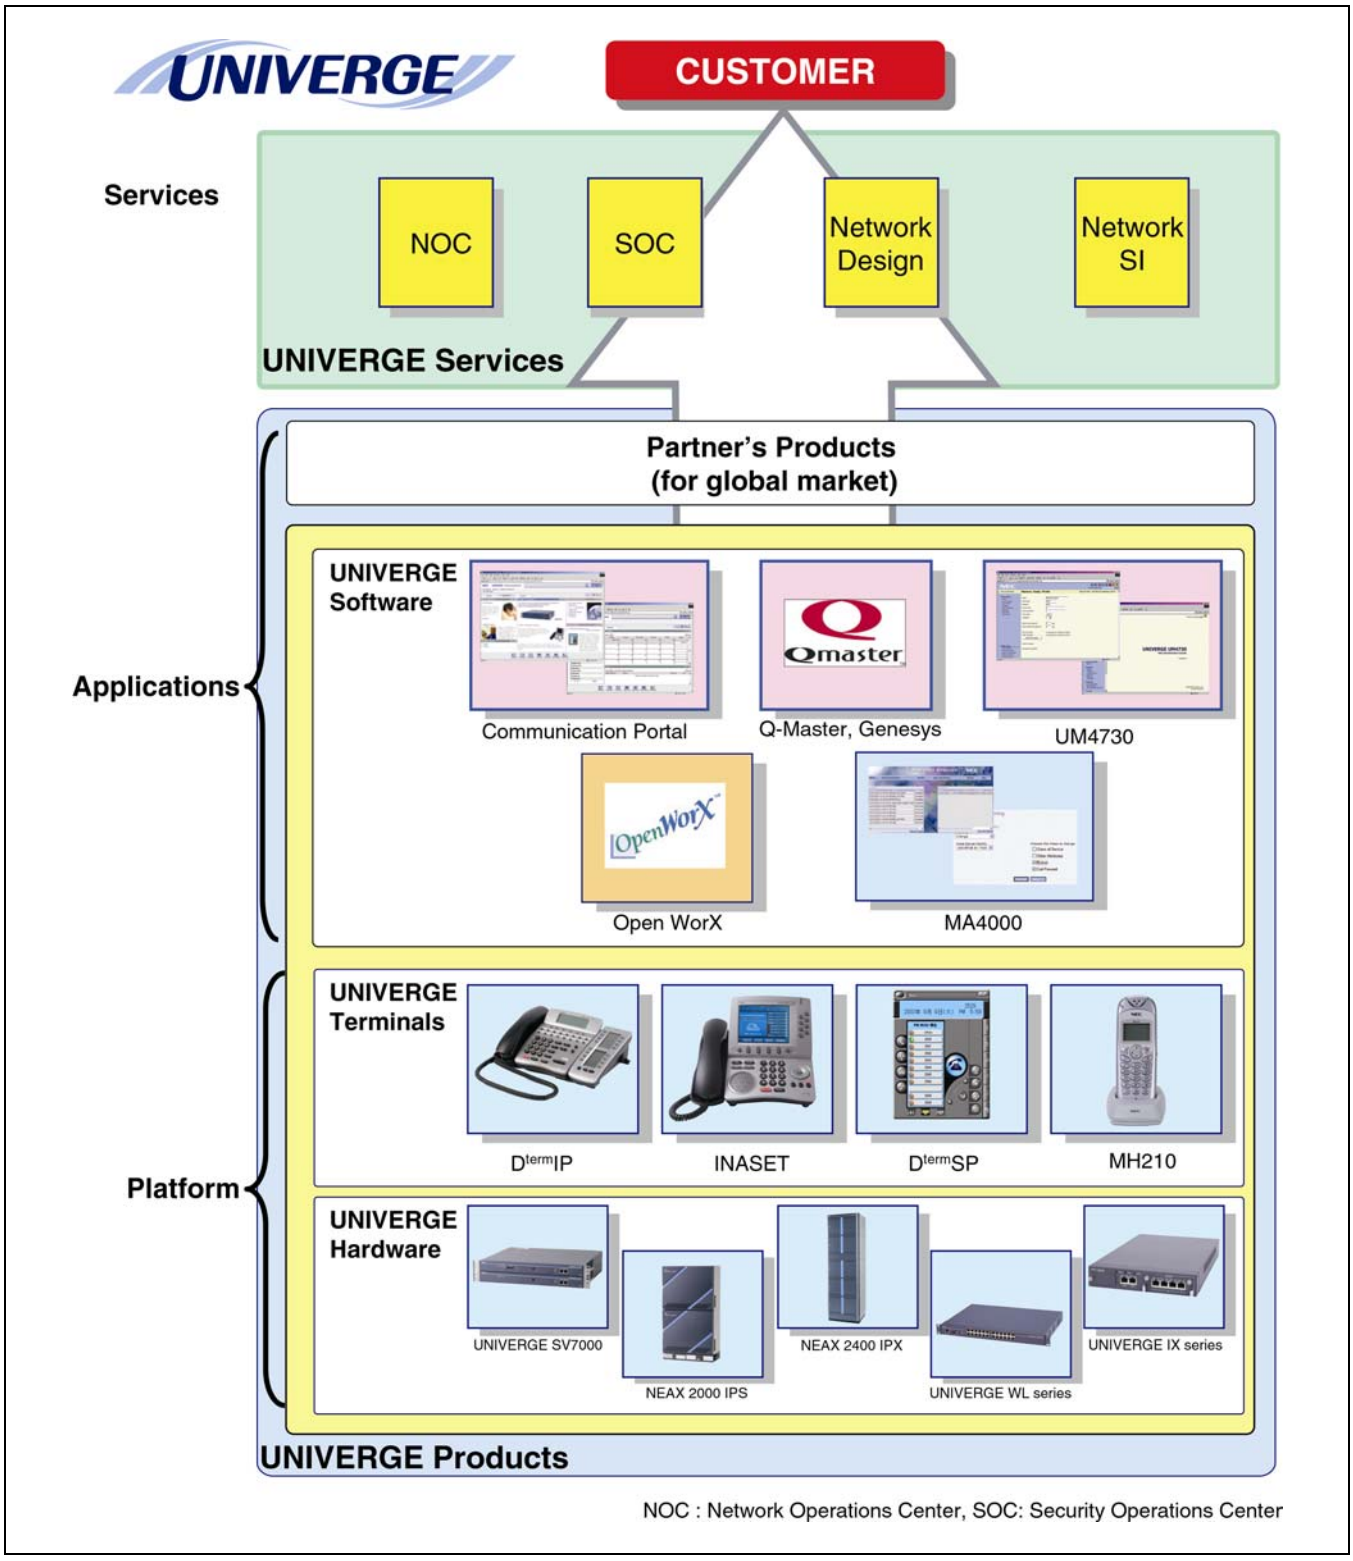

UNIVERGE Architecture

This document provides an overview of the NEAX 2000 IPS (Internet Protocol Server) stored program control digital electronic PBX. An introduction to the technical characteristics is included, along with a description of available system applications.

System Overview

The NEAX 2000 IPS is a full-featured IP-based communications system providing a rich feature set, with pure Voice over IP (VoIP) communications (peer-to-peer connections), across corporate Local and Wide Area Networks (LAN and WAN).

Figure 1-1 NEAX 2000 IPS

The NEAX 2000 IPS supports both pure IP switching (peer-to-peer connections) and Time Division Switching. The pure IP switching is provided for communications between D^{term}IPs and for CCIS connections with another NEAX 2000 IPS/NEAX 2400 IPX/SV7000 (CCIS over IP). On the other hand, the TDM switching is provided for communication between legacy stations/trunks. Connections between D^{term}IP/CCIS over IP and legacy stations/trunks are made via IP PADs, which converts packet-based voice data to TDM-based voice data, and vice versa.

D[term]IP telephones are designed to provide a converged infrastructure at the desktop, with a 100 BASE-T Ethernet connection to the LAN and built-in hub for a PC connection to the telephone itself. The system can provide peer-to-peer connections between D[term]IP telephones with voice compression, on a CCIS basis (CCIS over IP).
IPS also provide Windows PC based softphone (D[term] SP30) to connect to LAN network and it provides IP enabled D[term] features without the telephone set.

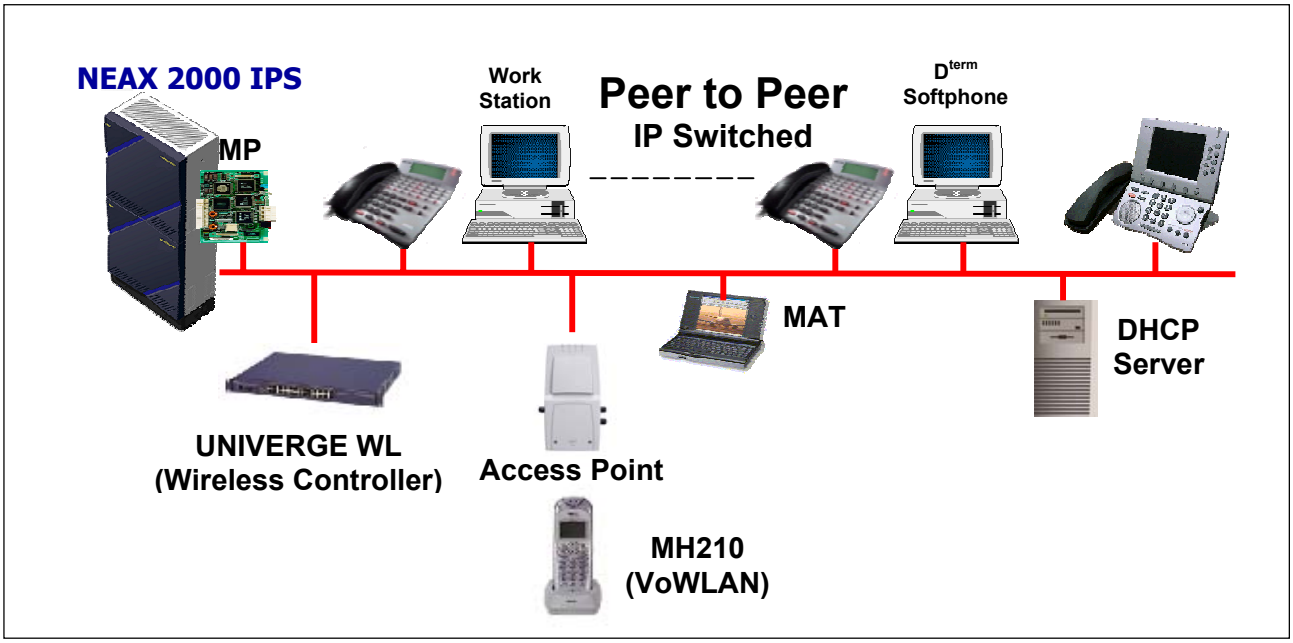

Figure 1-2 NEAX 2000 IPS System Overview

The NEAX 2000 IPS can also provide legacy station/trunk interfaces to support the existing Time Division Multiplexing (TDM) based infrastructure, such as analog telephones, analog networks, and digital networks (T1/E1, ISDN etc.). The legacy station/trunk interface cards can be accommodated in the Port Interface Modules (PIM). At maximum configuration, total system capacity is approx. 1,000 ports. The system can provide 956 ports for D[term]IP telephones, 512 ports for legacy LT cards and 256 ports for legacy AP cards. Communications between legacy station/trunks and D[term]IP telephones/IP networks are made via IP PAD, which converts packet-based voice data to TDM-based voice data, and vice versa. Both peer-to-peer connections and TDM-based connections are controlled by a new Main Processor (MP) card. The new MP card incorporates a built-in Device Registration Server (DRS) and a single interface point of IP connections to IP telephone, MATWorX, and OAI/ACD servers.

Remote PIM over IP

NEAX 2000 IPS can install a PIM at remote site through IP network. At the main site, the NEAX 2000 IPS is installed and the Remote PIM is installed at remote site. The main site controls call processing and service feature access for station users located both main and remote sites. When the Remote PIM cannot be connected with the main site due to the IP network and/or main PBX failure, the Remote PIM initializes the system and re-starts operation by its own Main Processor (survival mode). In the survival mode, almost all service features are provided to the station users accommodated in Remote PIM. When IP network/main PBX is recovered, the Remote PIM can be restored to normal mode by manual operation or automatically (Selectable by system data setting).

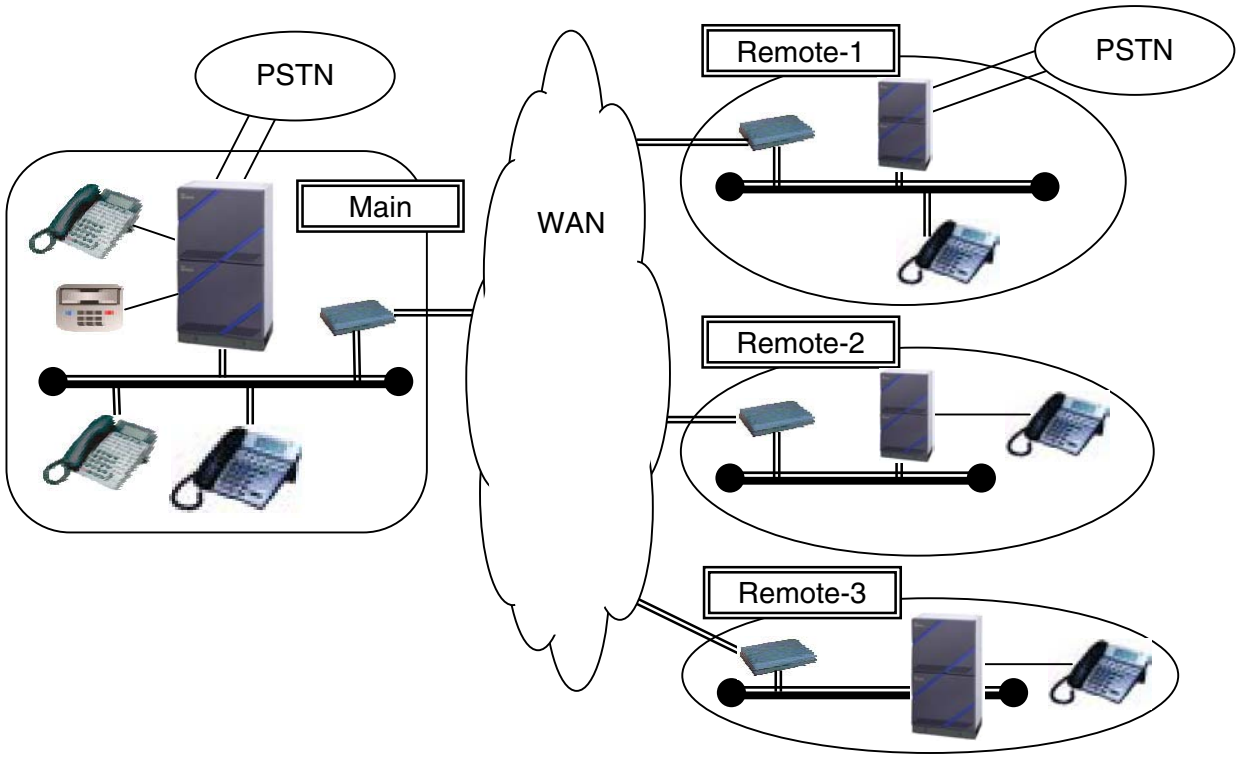

Note 1: *Both legacy and IP stations/trunks can be accommodated in Remote PIM.*
Note 2: *When the Remote PIM accommodates legacy trunk, the incoming/outgoing calls are connected to the station through local TDSW.*

Figure 1-3 Example of Network Configuration of Remote PIM over IP

Migration Path

For customers who are using the NEAX 7400 ICS M100MX*, the migration path is supplied. By replacing the existing MP card to the new IPS MP card, the NEAX 7400 ICS M100MX* can be upgraded to IP/TSW Hybrid System including new and enhanced service features introduced with the NEAX 2000 IPS.

For customers who are using NEAX 7400 ICS M100*, by replacing existing PN-CP00/CP03 with Retrofit MP and PN-CP01 with Retrofit FP, the NEAX 7400 ICS M100/M80VS can be upgraded to the NEAX 2000 IPS features. In case of NEAX 7400 ICS M100 Dual MP System the CP02 is replaced with Retrofit Dual MP. (See the following figure showing replacement of control cards. As for the LT/AP card conditions after upgrading, refer to the "NEAX 2000 IPS Card Application List".)

* "NEAX 7400 ICS M100MX" is marketed in North/Latin America and Australia as "NEAX 2000 IVS^2" and in UK as "NEAX 2000 INTEGRATED VOICE SERVER."
* "NEAX 7400 ICS M100" is marketed in North America as "NEAX 2000 IVS" and in Australia as "NEAX ICS 120".

Hardware Architecture

Reduced Hardware with IP-based Architecture

The D^{term}IPs and D^{term} Softphone connected to the LAN do not require any special interface cards* because they can be interfaced directly with the LAN and connected with peer-to-peer basis. When the D^{term}IP or D^{term} Softphone is connected to a station/trunk that is using TSW, the speech path between LAN and TSW is made via IP PAD under the call processing control of the MP. The D^{term}IP or D^{term} Softphone can be expanded simply adding the terminal itself. With this system architecture, the hardware such as DLC, CSI, CSH, PIM, Power Supply etc. is reduced and easy moves, adds, and changes can be realized.

Standard TDM Hardware	Peer-to-Peer IP Hardware
▪ Line & Trunk Cards ▪ Application Processors ▪ Firmware Processors	▪ IP PAD ▪ Ether Card

Powerful, One-board Main Processor (MP) with Integrated Functionality

The NEAX 2000 IPS Main Processor (MP) is the heart of pure IP connections and TDM-based connections. The MP employs a high-speed CPU, which is equivalent with Pentium. With this processing power and System On Chip (SOC) technology, the MP integrates Device Registration Server (DRS) and AP01 (OAI) functions. Also, by means of today's advanced LSI technology, the MP card size is minimized and On-board Ethernet Interface card is mounted on the MP without using an additional slot space in the PIM. This interface card is linked with LAN for call control processing of D^{term}IP and inter-work with MATWorX and OAI server.

* DLC, CSI and CS handler.

Extended Application Processor (AP) Port Capacity

The NEAX 2000 IPS provides a maximum of 256 AP ports and it is independent of the 512 ports for the Line/Trunk (LT), therefore, more AP cards such as T1/E1 digital link cards can be used in the system.

Universal Slot

One PIM provides 12 card slots for Line/Trunk (LT). Also, these card slots can be used for Application Processor (AP) cards without complicated limitation. This makes easy quotation and installation, and more AP cards can be mounted in one PIM.

Unified Circuit Card Size

All the circuit cards for the NEAX 2000 IPS are designed in one size (PN-type), and installed in the PIM. This maximizes the efficiency of slot utilization of the PIM.

High Density Line/Trunk Cards

The major line/trunk cards used in the NEAX 2000 IPS are provided with 8 circuits per card. This allows the physical system size to be compact.

Various Power supply system

- AC Input system
  The PIM houses the AC/DC power supply with various AC (100V/200V) input that outputs various DC voltage required for several internal cards.
  The AC/DC power supply has function of Battery charger. Thus, system can be backed up with battery according to necessity.
  The PIM also houses optional DC/DC power supply for the cards that require -48V power such as CSI card used for interface of cell station/zone transceiver.
- DC Input system
  NEAX 2000 IPS also provides the DC/DC power supply with -48V DC input house in the PIM that outputs various DC voltage required for several internal cards.
  Thus, NEAX 2000 IPS can be installed at various powering environment.

Various Installation Methods

To meet the specific needs of the customer's environment, the NEAX 2000 IPS provides the following installation methods:

- Floor Standing Installation
- Wall-mounting Installation
- IEC standard 19-inch Rack-mounting Installation

Software Architecture

Built-in DRS (Device Registration Server) on MP

The NEAX 2000 IPS incorporates DRS (Device Registration Server) on the MP. DRS provides Log-in/Log-out management of D^{term}IP including Registration and Authentication. Also, the built-in DRS can be inter-worked with DHCP server to provide easy administration on IP address.

Technical Terms

Table 1-1 Technical Terms of NEAX 2000 IPS System

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
AMP	Amplifier Trunk Card	LC	Line Circuit Card (for Single Line Telephone)
AP00	SMDR/Hotel Application Card	LDT	LD Trunk Card
BGM	External Music Source for Dterm Back Ground Music Service	LLC	Long Line Circuit Card
BRT	Basic Rate Interface Trunk Card	M10	Optical Interface Card
CCH	Common Channel Handler Card	MAT	Maintenance Administration Terminal
CFT	6/10 Party Conference Trunk Card	MDF	Main Distribution Frame
CIS	Call Information System	MEM	Main Memory
CIR	CALLER ID Receiver Trunk Card	MFR	MF Receiver/ MFC Receiver/Sender Card
COT	C.O. Trunk Card	MLDT	Melody Trunk
CSI	CS/ZT Interface Card	MODEM	Modem
CS/ZT	Cell Station (For Australia/Others) Zone Transceiver (For North America/ Latin America)	MP	Main Processor Card
DAT	Digital Announcement Trunk Card	PFT	Power Failure Transfer
DCH	D-channel Handler Card	PMS	Property Management System
DIT	DID Trunk Card	OAI	Open Application Interface
DK	External Relay/Key Interface Card	ODT	OD Trunk Card (2/4 wire E&M)
DLC	Digital Line Circuit Card (for Dterm, DESKCON)	PBR	PB Receiver Card
DSS	Direct Station Selection Console	PBSND	PB Sender
DTI	Digital Trunk Interface Card	PLO	Phase Locked Oscillator
DTG	Digital Tone Generator	PS	Personal Station
ETHER	Ethernet Control Card	PRT	ISDN Primary Rate Interface Trunk Card
ICH	ISDN-channel Handler Card	SMDR	Station Message Detail Recording
ILC	ISDN Line Circuit Card	TDSW	Time Division Switch
IP-BS	IP Base Station	TNT	Tone/Music Source Interface Card
IP PAD	IP Packet Assembler/Disassembler Card (for peer – peer connection)	VCT	Voice Compression Card (for IP)
IPT	IP Trunk Card (for point – multipoint connection)	VM	Voice Mail Card
KEY	External Key	CFT	Circuit Four-Party Conference Trunk

Trunking Diagram

This figure shows a typical trunking diagram of the NEAX 2000 IPS system.

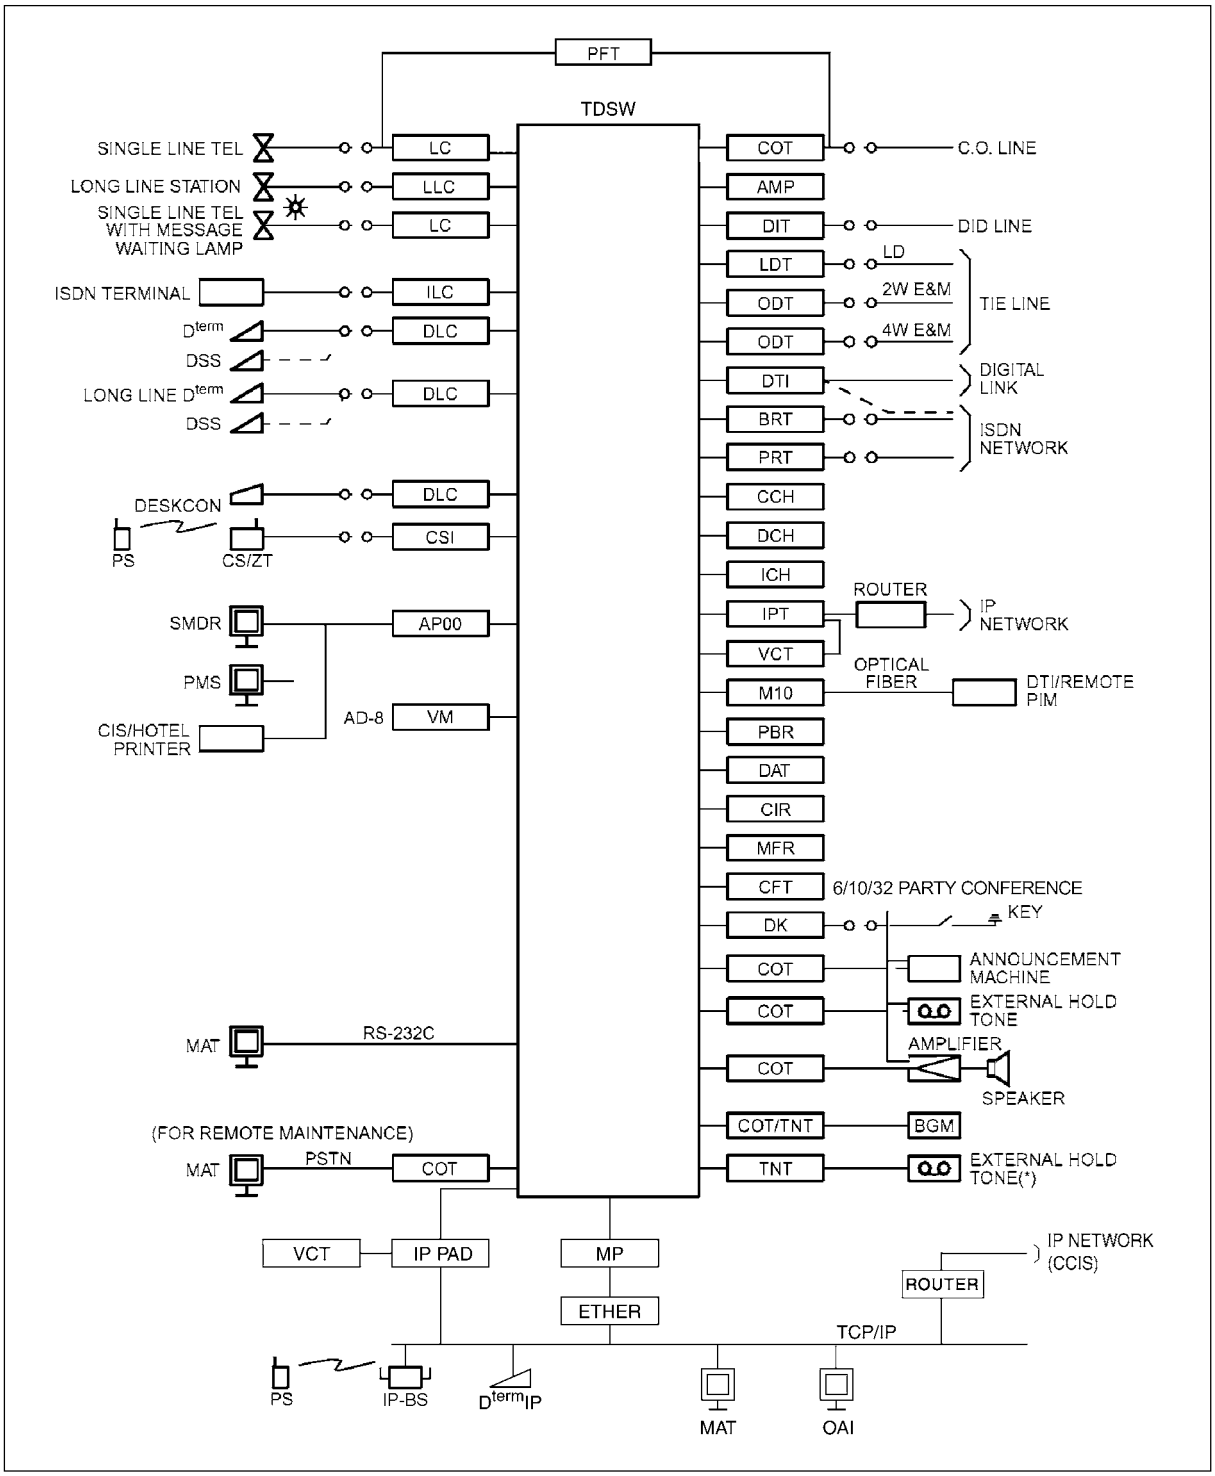

Figure 1-4 Trunking Diagram of NEAX 2000 IPS

CHAPTER 2 SYSTEM CONFIGURATION

Module Configuration

The NEAX 2000 IPS consists of Port Interface Modules (PIM) depending on the system configuration, and there are two types of PIMs; "Physical" PIM and "Virtual" PIM.

The Physical PIM is a "hardware" PIM and is used to accommodate an MP, FPs, IP PADs, legacy LT an AP cards, and power supply units. One Physical PIM provides up to 64 ports.

The Virtual PIM is a "software" PIM and is used to assign D^{term}IP telephones, D^{term} SP30 or IP-BS by system programming. One Virtual PIM provides up to 64 D^{term}IP telephones. The system consists of up to 8 PIMs, by the combination of Physical PIMs and Virtual PIMs, thus providing 956 ports for D^{term} IP telephones and 512 ports for legacy LT cards. The total number of ports for D^{term}IP telephones and legacy LT cards must be 1020 or fewer, so that the number of Physical PIMs decreases when that of Virtual PIMs (= number of D^{term}IP telephones) increases. For example, when 256 legacy LT ports are required (= four Physical PIMs), the maximum number of D^{term} IPs is 256.

The figure below shows examples by combination of legacy LT ports and D^{term} IP telephones.

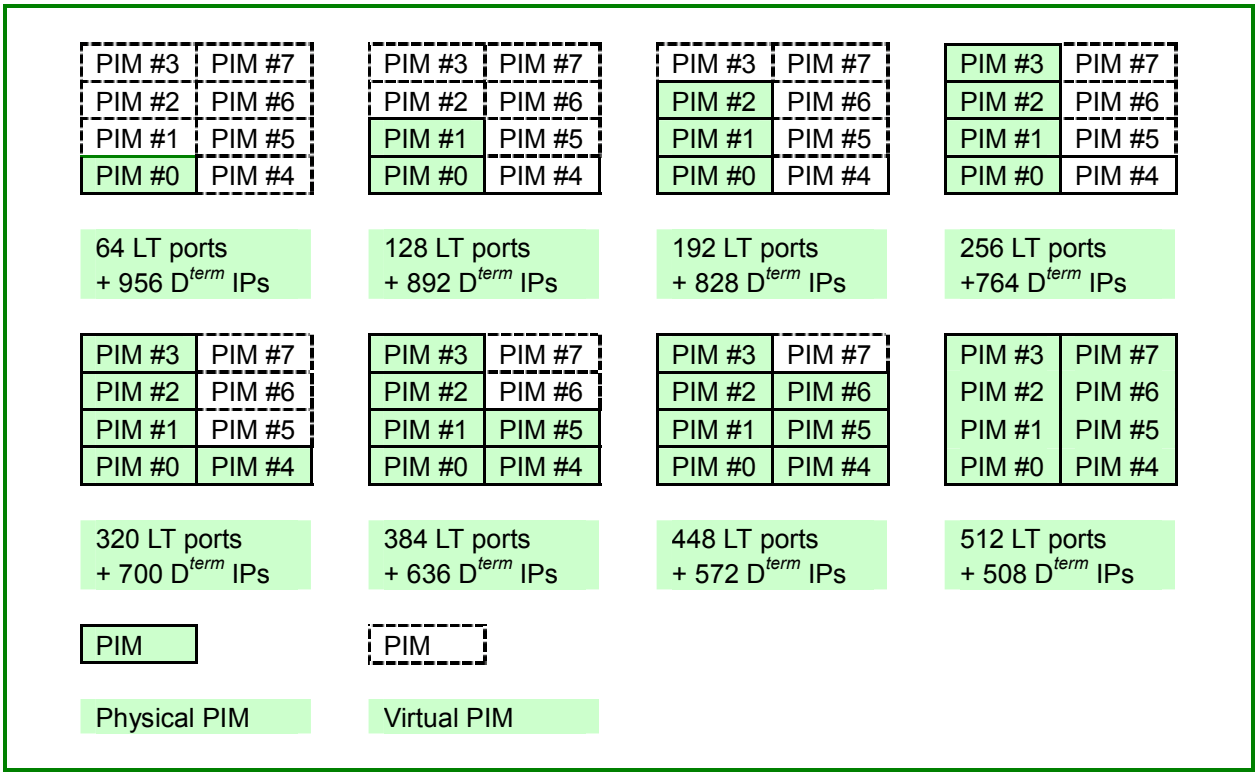
PIM #3 PIM #7
PIM #2 PIM #6
PIM #1 PIM #5
PIM #0 PIM #4
64 LT ports + 956 Dterm IPs
128 LT ports + 892 Dterm IPs
192 LT ports + 828 Dterm IPs
256 LT ports +764 Dterm IPs
320 LT ports + 700 Dterm IPs
384 LT ports + 636 Dterm IPs
448 LT ports + 572 Dterm IPs
512 LT ports + 508 Dterm IPs
PIM
Physical PIM
PIM
Virtual PIM

Figure 2-1 Module Configuration of NEAX 2000 IPS

Installation Methods

The NEAX 2000 IPS provides three installation methods as follows:

- Floor Standing Installation
- Wall Mounting Installation
- 19-inch Rack Mounting Installation

Floor Standing Installation

In Floor Standing Installation, the NEAX 2000 IPS is comprised of up to 8 Port Interface Modules (PIMs).

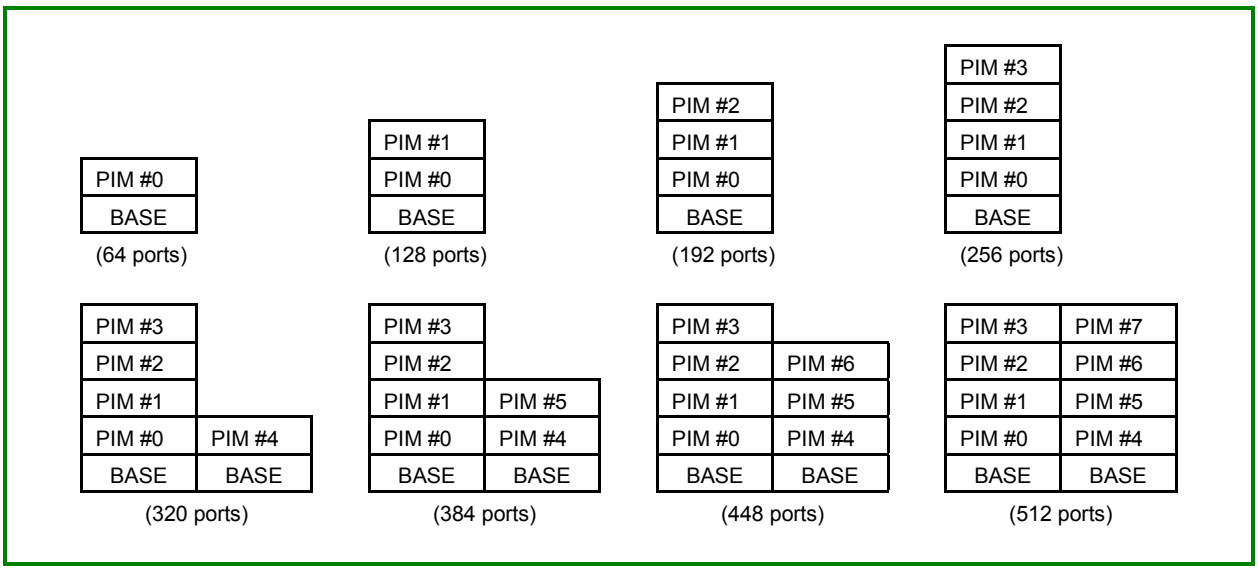

Figure 2-2 Face Layout of NEAX 2000 IPS

Wall-mounting Installation

The NEAX 2000 IPS can be wall-mounted with single or multiple PIM (MAX. 8) configuration.

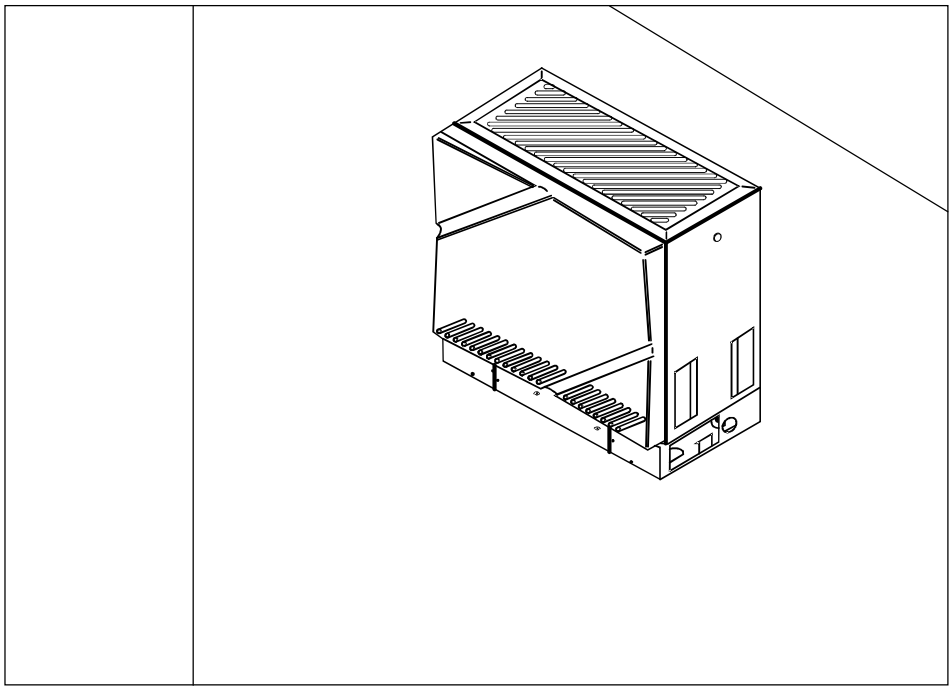

Figure 2-3 Wall-mounting of PIM

19-inch Rack-mounting Installation

The NEAX 2000 IPS can be mounted in the IEC-standard 19-inch rack up to 4 PIMs.
(IEC: International Electro-technical Commission)

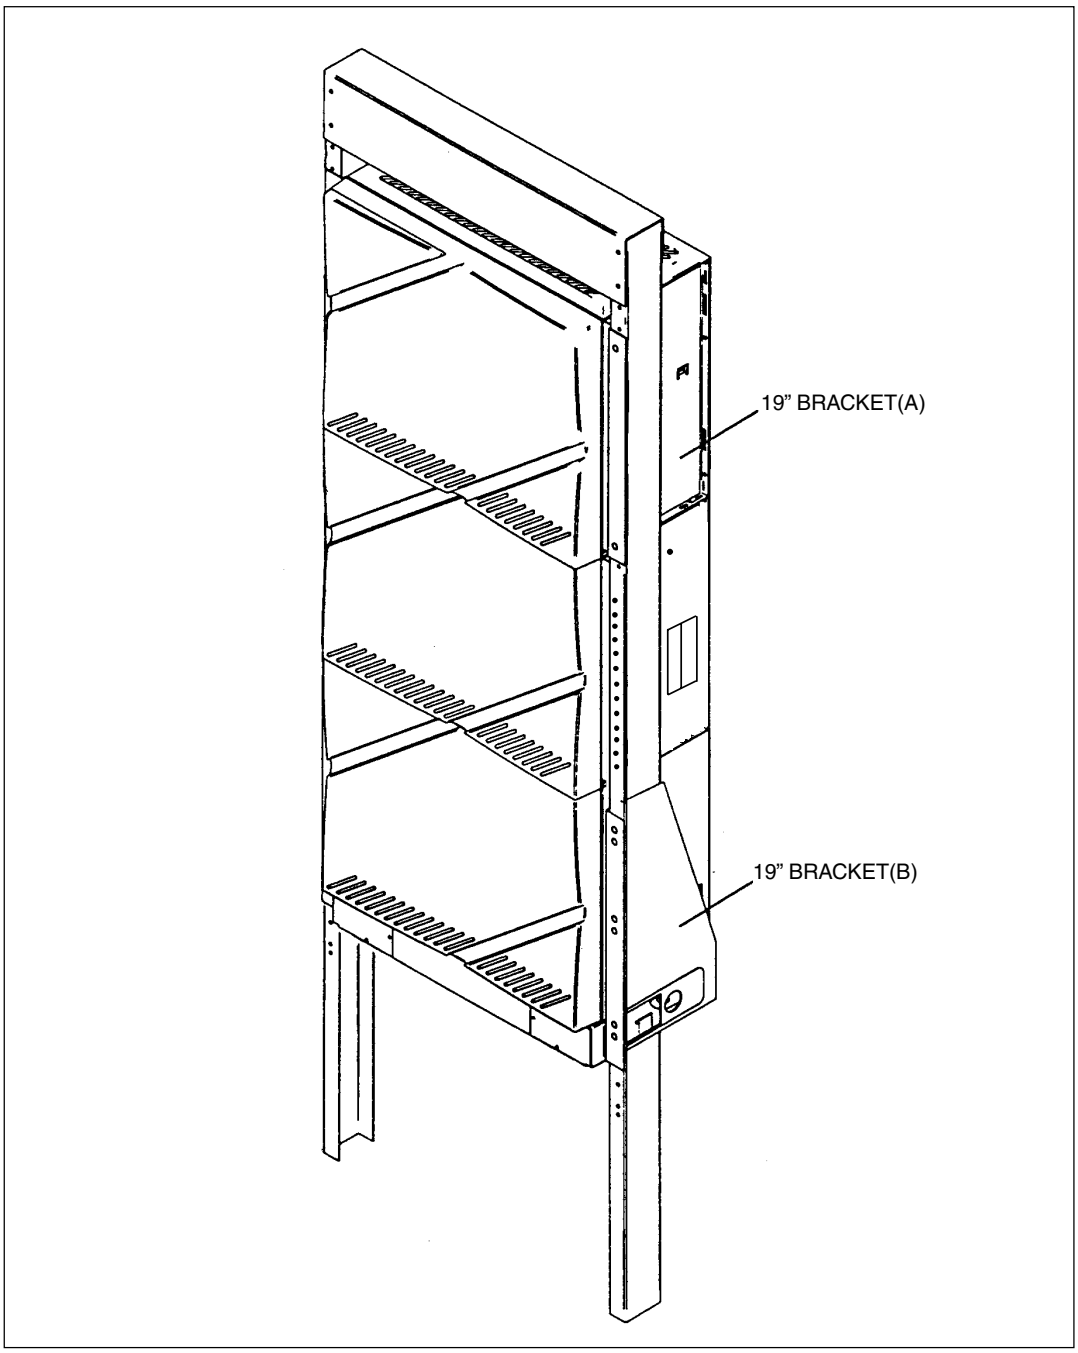

Figure 2-4 19-inch Rack-mounting

Modules and Installation Hardware

The NEAX 2000 IPS is comprised of up to 8 Port Interface Modules (PIMs).

Modules

(1) *Port Interface Module (PIM)*

A PIM provides 13 card slots for common control, Line/Trunk (LT), and Application Processor (AP) cards. It also houses an AC/DC Power Supply (or DC/DC Power Supply), optional DC/DC Power Supply (for -48V), and batteries for protection from short-term (about 30 min.) power interruption.

Four champ connectors for Line/Trunk (LTC 0 to 3) are located at the lower front side of the PIM.

A PIM provides a maximum of 12 card slots for Line/Trunk (LT) and Application Processor (AP) cards. At maximum configuration, the system is comprised of 8 PIMs.

PIM MD (PIM3)	PIM MD (PIM7)
PIM MD (PIM2)	PIM MD (PIM6)
PIM MD (PIM1)	PIM MD (PIM5)
PIM MD (PIM0)	PIM MD (PIM4)

Single MP System

PIM MD (PIM3)	PIM MD (PIM7)
PIM MD (PIM2)	PIM MD (PIM6)
PIM MD (PIM1)	PIM MD (PIM5)
PIM MF (PIM0)	PIM MD (PIM4)

Dual MP System

(2) *Battery Module (BATTM)**

The BATTM is an optional module for installing optional long-term (about 3 hours) backup batteries. The BATTM is designed to accommodate batteries covering up to a 4-PIM system (2 BATTMs support maximum system configuration).

The BATTM is available for Floor Standing Installation. (When the system is Wall-mounting/19-inch Rack-mounting configuration, the BATTM cannot be installed with the PIM.)

Table 2-1 Modules of NEAX 2000 IPS System

Abbrev	Name Code	Remarks
PIMMD	SN1617 PIMMD	PIM 0 ~ PIM 7
PIM MF	SN1658 PIMMF	PIM0 for dual MP system
BATTM	SN1619 BATTMB	1/STACK, Max.2/system

* Battery Module is available for Latin America.

Circuit Cards

The circuit cards used for NEAX 2000 IPS are divided into the following three types. According to these card types, the mounting location of card and port allocation of the Time Division Switch are varied.

- Common Control Cards
  - Main Processor (MP)
  - Firmware Processor (FP)

- Line/Trunk (LT) Cards
  - IP PAD, Line Circuit (LC), Central Office Trunk (COT), Tie Line Trunk (LDT/ODT), PRI Trunk (PRT) etc.

- Application Processor (AP) Cards
  - SMDR/PMS/CIS/Hotel Printer Interface (AP00)
  - T1/E1 Digital Trunk Interface (DTI)

System Conditions

Conditions for Peer-to-Peer Connection

- For the communication between D^{term} IPs, the voice data is transmitted and received directly, without converting voice packets into PCM and voice compression in the system.

Conditions for CCIS Connection

- D^{term} IP to D^{term} IP connection (Peer-to-Peer connection) via CCIS is available only when the destination office uses NEAX 2000 IPS, NEAX 2400 IPX or SV7000.
- The built-in CCH-IPT of MP card can be connected to max. 127 trunks.
- The system provides only Point-to-Multipoint connection.

Conditions for H.323 Connection

- When connecting to the IP network with H.323 protocol, the IPT card is required.
- When connecting to the IP network with H.323 protocol, the voice data is transmitted and received via the IP-PAD card.

Conditions for Legacy Interface (LT/AP)

- All Application Processor cards used in NEAX 7400 ICS M100MX* except AP01 and CC01 cards are available for the system.
- All Line/Trunk cards used in NEAX 7400 ICS M100MX* are available for the system.

* "NEAX 7400 ICS M100MX" is marketed in North/Latin America and Australia as "NEAX 2000 IVS^{2}" and in UK as "NEAX 2000 INTEGRATED VOICE SERVER."

Conditions for Maintenance

- MATWorX can be used as the maintenance program for NEAX 2000 IPS. Direct connection (RS-232C), Modem connection and LAN (TCP/IP) connection are available to connect to the MAT (Maintenance Administration Terminal).

Conditions for DRS

DRS = Device Registration Server

- The D^{term} IP registration is executed by the DRS-System Based. The DRS-Network Based is not available for the D^{term} IP registration.
- The DRS can be used as the Proxy server.

CHAPTER 3 TERMINALS

A variety of terminal equipment may be connected to the NEAX 2000 IPS. The following equipment may be installed with the system.

- Attendant Console
  - Desk Console
- D^{term} Series i
  - D^{term} 2 (White/Black Color) : 2-button terminal
  - D^{term} 4D (Black Color) : 4-button terminal with LCD display
  - D^{term} 8 (White/Black Color) : 8-button terminal
  - D^{term} 8D (White/Black Color) : 8-button terminal with LCD display
  - D^{term} 16D (White/Black Color) : 16-button terminal with LCD display
  - D^{term} 32D (White/Black Color) : 32-button terminal with LCD display
  - D^{term} 16 LD (White/Black Color) : 16-button LD terminal with LCD display
- D^{term} IP
  - D^{term} 4D (Black Color) : 4-button terminal with LCD display
  - D^{term} 8D (White/Black Color) : 8-button terminal with LCD display
  - D^{term} 16D (White/Black Color) : 16-button terminal with LCD display
- PS (Wireless Handset)
  - PHS model
  - PCS model
- D^{term} SP30 (IP Softphone)
- VoWLAN
  - MH210

Desk Console

The SN716 Desk Console has an ergonomic design and provides full access to all PBX Console features. It connects to the NEAX 2000 IPS using the same circuit cards as the D^{term} 75 Series terminals. The SN716 Desk Console operates on a switched-loop basis with a maximum of 6 Attendant loops terminating at each console on the associated Interface card. The Attendant uses these loops for answering, originating, holding, extending, and reentering calls. When Attendant loop release is used, the number of loops is effectively increased to a maximum of 12 for each console.

The NEAX 2000 IPS supports a maximum of eight SN716 DESK Consoles.

SN716 DESKCON Features

- Character LCD (4x40 characters)
- LCD designation strips
- Software-controlled LCD loop key
- Full access to PBX features
- Headset connectivity
- Recorder connectivity

Figure 3-1 DESK Console

D^term Series i/D^term IP Digital Multifunction Terminals

The D^term Series digital multifunction/multiline terminal is available in two colors to meet the needs of various users based on the features and types of communications each end user requires.

D^term Series i
- D^term 2 (White/Black Color) : 2-button terminal
- D^term 4D (Black Color) : 4-button terminal with LCD display
- D^term 8 (White/Black Color) : 8-button terminal
- D^term 8D (White/Black Color) : 8-button terminal with LCD display
- D^term 16D (White/Black Color) : 16-button terminal with LCD display
- D^term 32D (White/Black Color) : 32-button terminal with LCD display
- D^term 16LD (White/Black Color) : 16-button LD terminal with LCD display

D^term IP
- D^term 4D (Black Color) : 4-button terminal with LCD display
- D^term 8D (White/Black Color) : 8-button terminal with LCD display
- D^term 16D (White/Black Color) : 16-button terminal with LCD display

Features most commonly used in daily operation and functions required by the user are provided by the following dedicated buttons/lamp.

- ***Hold*** - Press key to place an internal or external call on hold.
- ***TRANSFER*** - Allows the station user to transfer established calls to another station without attendant assistance.
- ***ANSWER*** - When LED on this key is lighted, press key to answer a waiting call.
- ***SPEAKER*** - Controls the built-in speaker that can be used for Hands Free Dialing/Monitoring and Voice Call.
- ***REDIAL*** - Press key to activate the redial feature, then press redial and scroll back through numbers that have been dialed. When desired number is displayed, press the key to activate dialing.
- ***CONF*** - Press key to establish a three-way conversation.
- ***RECALL*** - Press key to terminate established call and returns to the internal dial tone.
- ***FEATURE*** - Used to activate terminal setup functions and to program One-Touch Speed Dial/Feature Keys.
- ***DIRECTORY*** - Press key to activate speed calling.
- ***MESSAGE*** - Press key to access the voice mail system.
- ***MIC*** - Press key to respond hands free. LED on this key lights during speakerphone operation.

This ergonomically designed terminal provides; larger keypad buttons for dialing convenience, an expanded three-line by 24-character LCD display, tiltable legs with nonskid feet, and a highly visible call/message indicator lamp.
All models have built-in hands-free unit as standard. The terminal is connected to the NEAX 2000 IPS via a single pair of cabling, thus optimizing existing cabling environment. These advantages make the D^term Series i terminals the standard for telephones that effectively meet today's business requirements.

D^term Series i/D^term IP Lineup

◆ D^term 2 (2-button D^term)

This D^term Series Digital Multi-line Terminal is equipped with 8 dedicated Function keys (such as Hold, TRANSFER, ANSWER, SPEAKER, REDIAL, CONF, RECALL and FEATURE), 2 programmable Line/Feature keys (each with a two-color LED). 2 programmable keys are flexible and can be assigned to any outside line connected to the system, to another station line, or as a feature button. The terminal is available in two colors - Black (BK) and Ivory White (WH).

◆ D^term 4D (4-button D^term with Display)

This D^term Series Digital Multi-Line Terminal is equipped with 11 dedicated Function keys, 4 programmable Line/Feature keys (each with a two-color LED), built-in Speakerphone, built-in Headset Jack, Tone/Volume/Contrast control, Tilt Stand, 3 line by 24-character LCD Display Panel (adjustable & detachable), four Soft Keys, and a Large LED to indicate incoming calls and messages. This terminal is available in two colors - Black (BK).

◆ D^term 8 (8-button D^term)

This D^term Series Digital Multi-line Terminal is fully modular with 11 dedicated Function keys, 8 programmable Line/Feature keys (each with a two-color LED), built-in Speakerphone, built-in Headset Jack, Tone/Volume/Contrast control, Tilt Stand, and a large LED to indicate incoming calls and messages. The terminal is available in tow colors - Black (BK) and Ivory White (WH).

◆ D^term 8D (8-button D^term with Display)

This D^term Series Digital Multi-Line Terminal is equipped with 11 dedicated Function keys, 8 programmable Line/Feature keys (each with a two-color LED), built-in Speakerphone, built-in Headset Jack, Tone/Volume/Contrast control, Tilt Stand, 3 line by 24-character LCD Display Panel (adjustable & detachable), four Soft Keys, and a Large LED to indicate incoming calls and messages. This terminal is available in two colors - Black (BK) and Ivory White (WH).

◆ D^term 16D (16-button D^term with Display)

This D^term Series Digital Multi-Line Terminal is equipped with 11 dedicated Function keys, 16 programmable Line/Feature keys (each with a two-color LED), built-in Speakerphone, built-in Headset Jack, Tone/Volume/Contrast control, Tilt Stand, 3 line by 24-character LCD Display Panel (adjustable & detachable), four Soft Keys, and a Large LED to indicate incoming calls and messages. This terminal is available in two colors - Black (BK) and Ivory White (WH).

◆ D^term 32D (32-button D^term with Display)

This D^term Series Digital Multi-Line Terminal is equipped with 11 dedicated Function keys, 32 programmable Line/Feature keys (each with a two-color LED), built-in Speakerphone, built-in Headset Jack, Tone/Volume/Contrast control, Tilt Stand, 3 line by 24-character LCD Display Panel (adjustable & detachable), four Soft Keys, and a Large LED to indicate incoming calls and messages.

◆ D^term 16LD (DESI Less 16 LD button D^term with Display)

This D^term Series Digital Multi-Line Terminal is equipped with 11 dedicated Function keys, 16 programmable Line/Feature keys (each with a two-color LED), built-in Speakerphone, built-in Headset Jack, Tone/Volume/Contrast control, Tilt Stand, 3 line by 24-character LCD Display Panel (adjustable & detachable), four Soft Keys, and a Large LED to indicate incoming calls and messages. This terminal is available in two colors - Black (BK) and Ivory White (WH).

D^term Series i/D^term IP Accessories

◆ Direct Station Selection (DSS) Console

This Console is equipped with 60 programmable line keys (each with a two-color LED). These keys can be programmed as Direct Station keys, Function keys, or Line keys. The DCU-60 Console is available in two colors - Black (BK) and Ivory White (WH).

◆ Analog Port Adapter (APR)

The Analog Port Adapter with Ringing (APR-U) provides an interface for installing single line telephones (SLTs), modems*. By installing the APR-U, calls may be initiated via a PC modem and switched to voice operation if desired. Data calls at a maximum speed of 28.8 kbps are also supported through the APR-U. The APR-U also has the added benefit of detecting incoming ringing signals. By providing ring detection, the user may wish to install a personal fax machine or an answering machine at the workstation and connect them through the D^term Series instrument for convenience.

* When a modem is installed to the D^term Series Multi-line terminal with the APR-U, the modem and the D^term Series Multi-line Terminal (handset, speakerphone, headset) cannot be used simultaneously.

◆ Ancillary Device Adapter (ADA)

The Ancillary Device Adapter (ADA-U) allows for a direct connection from the D^term Series i/ D^term IP terminal to a tape recorder for logging/recording telephone calls. A dedicated set of input connectors is also provided for a recording tone unit to inform the parties that the call is being recorded. The ADA-U does ***not*** require an AC adapter.

◆ Computer Telephony Adapter (CTA-R)

The Computer Telephony Adapter (CTA-R) provides D^term with a connection to desktop PC, allowing users to operate Windows®-based Computer Telephony application such as ClientPhone 32.

◆ IP Adapter (IP-R)

The IP Adapter Unit (IP-R) provides two 10/100 Base-T Ethernet ports to the Local Area Network (LAN) and a built-in switching hub for a PC connection to the adapter itself.
Operating power can be fed by either an AC/DC adapter unit or a power patch panel connected to the LAN switch/hub.
When the IPW is attached to the D^term, other optional accessories cannot be attached except for Ancillary Device Adapter (ADA).

◆ Wall Mount Unit (WM-R)

The Wall Mount Unit (WM-R) allows the D^term Series terminal to be conveniently mounted vertically when desk space is not available.

Figures of D^term Series i/D^term IP

* D^term 2 (Black) is also supported.

Figure 3-2 D^term 2 (White)

Figure 3-3 D^term 4D (Black)

* D^term 8 (Black) is also supported.

Figure 3-4 D^term 8 (White)

* D^term 8 D (Black) is also supported.

Figure 3-5 D^term 8D (White)

* D^term 16 D (Black) is also supported.

Figure 3-6 D^term 16D (White)

* D^term 32 D (Black) is also supported.

Figure 3-7 D^term 32D (White)

* DSS Console (White) is also supported.

Figure 3-8 DSS Console (Black)

* D^{term} 16LD (White) is also supported.

Figure 3-9 D^{term} 16LD (Black)

Figure 3-10 Analog Port Adapter (APR)

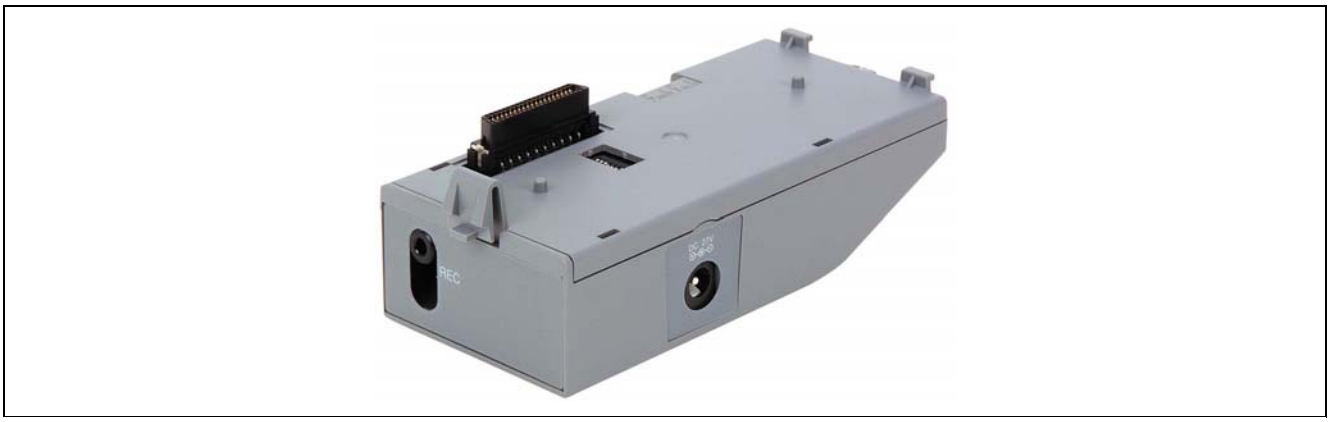

Figure 3-11 Ancillary Device Adapter (ADA)

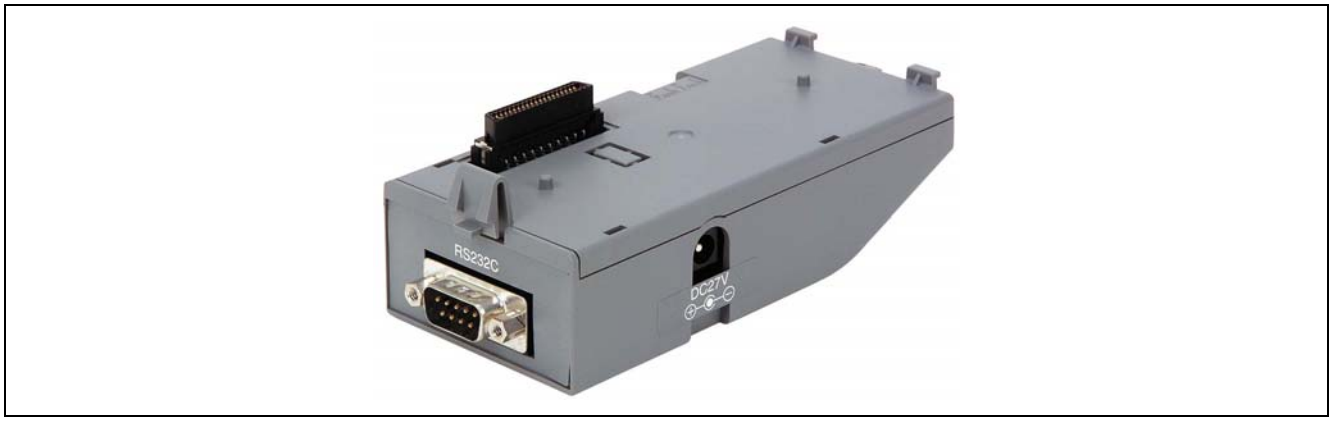

Figure 3-12 Computer Telephony Adapter (CTA-R)

Figure 3-13 IP Adapter (IP-R)

D^term Series i/D^term IP Specifications

The specifications of the D^term Series i/D^term IP are shown in below.

Table 3-1 D^term Series i/D^term IP Specifications and Accessories

Specifications/ Description	D^term 2	D^term 4D	D^term 8	D^term 8D		D^term 16D		D^term 16LD	D^term 32D
				D^term Series i	D^term IP	D^term Series i	D^term IP		
Dedicated Function Keys	8	11	11	11		11		11	11
Line/Feature Access/Programmable Feature Access Key	2	4	8	8		16		16	32
LCD	None	3 Lines 24 Chara -cters	None	3 Lines 24 Characters		3 Lines 24 Characters		(Icon+8 Digit) ×8 line ×2 panel 5×7 dot/ character	3 Lines 24 Charac- ters
Hands Free Operation: Half Duplex Full Duplex*[1]	Yes -	Yes	Yes Optional	Yes Optional	- Yes	Yes Optional	- Yes	Yes Optional	Yes Optional
Call/Message Indicator	Yes	Yes	Yes	Yes		Yes		Yes	Yes
Adjustable Legs (Built-in WMU)	No	No	Yes	Yes		Yes		Yes	Yes
Volume Control Handset (Receiver)	Yes	Yes	Yes	Yes		Yes		Yes	Yes
Volume Control Speakerphone (Receiver)	Yes	Yes	Yes	Yes		Yes		Yes	Yes
Volume Control Headset (Receiver)	Yes	Yes	Yes	Yes		Yes		Yes	Yes
Ring Volume Control	Yes	Yes	Yes	Yes		Yes		Yes	Yes
Brightness Control-LCD Contrast	-	Yes	-	Yes		Yes		-	Yes
Housing Color	White or Black	Black only	White or Black	White or Black		White or Black		White or Black	White or Black
Soft Keys	No	Yes	No	Yes		Yes		Yes	Yes
Optional Accessories									
Add-on Module (DCU-60)	No	No	Yes	Yes	No	Yes	No	Yes	Yes
Ancillary Device Adapter (ADA-U)	No	No	Yes	Yes	No	Yes	No	Yes	Yes
Analog Port Adapter w/ Ringing (APR-U)	No	No	Yes	Yes	No	Yes	No	Yes	Yes
PC Telephony Adapter (CTA)*[2]	No	No	Yes	Yes	No	Yes	No	Yes	Yes
IP Adapter (IPW)	No	No	No	Yes	No	Yes	No	Yes	Yes

*[1] Optional in US/Australia Market
*[2] It operates only as the D^term75 mode.

Table 3-2 Combination Pattern of Optional Accessories to the D^{term} Series i/ D^{term} IP

Combination Pattern	APR	ADA	CTA-R	IP-R	WM-R
1		X			X
2					X
3	X				X
4			X		X
5				X	X
6		X			X
7	X	X			X
8		X	X		X
9			X		X
10	X		X		X

X : Available

Wireless System

A mobile work force no longer has to be dependent on special technology.

With personal telephone and Wireless Communication System, employees can travel throughout a multistored building or across a large industrial complex and continue to stay in constant touch with customers and colleagues.

NEAX 2000 IPS has built-in wireless system for providing wireless communication, it can support up to 72 users.

Versatile Communication Tool for a variety of industries

(1) Business Offices
Even when an employee in the company cannot be reached at their desk, the wireless communication service can put them in touch immediately.
A call from a customer can be connected directly to the called employee without holding the call or asking the customer to call back. This means improved customer satisfaction.
Even when a company has offices in several different buildings, just install the connection unit, then all you have to do is carry the handy phone set to place or receive calls anywhere. Since the wireless communication service does not require reinstallation of equipment or re-registration of extension numbers whenever you change the office layout, it can effectively reduce costs.

(2) Medical Centers (or Hospitals)
By assigning a personal handy phone to each doctor and nurse, they can be reached anywhere in the hospital for faster response to emergencies.
Better service can be offered to in-patients as well as patients with walking disabilities by lending them handy phone sets.
Speedier communications is an extra touch that will make the patients reassured that they are in good hands.

(3) Plants
The wireless communication service allows bi-directional communications in large working areas such as plants, warehouses, and factories.
Instructions and messages from the office or reports from the plant can be conveyed in real-time to help improve productivity.
The wireless service also makes it possible to verify the process while moving over a line or to check the inventory in the warehouse with someone in the office over the telephone.
Use the optional headset for hands-free communications without work interruptions for better safety and work efficiency.

(4) Department Stores and Hotels

On the sales floor, the wireless communication service allows a clerk to check inventory for a customer or promptly call the manager. When holding an even or exhibition, or when changing the sales floor layout, the wireless service requires no cable laying or transfer, so telephone installation and removal are simple.

At hotels and resorts, the wireless communication service can be used between the front desk and the rest of the complex and for communications and instructions between staff members of an event in the complex.

Assign each security guard a handy phone set, and you can realize more systematic reporting and higher mobility, as well as higher security in the event of an emergency.

System Configuration

Figure 3-14 shows the system configuration of NEAX 2000 IPX wireless communications system.

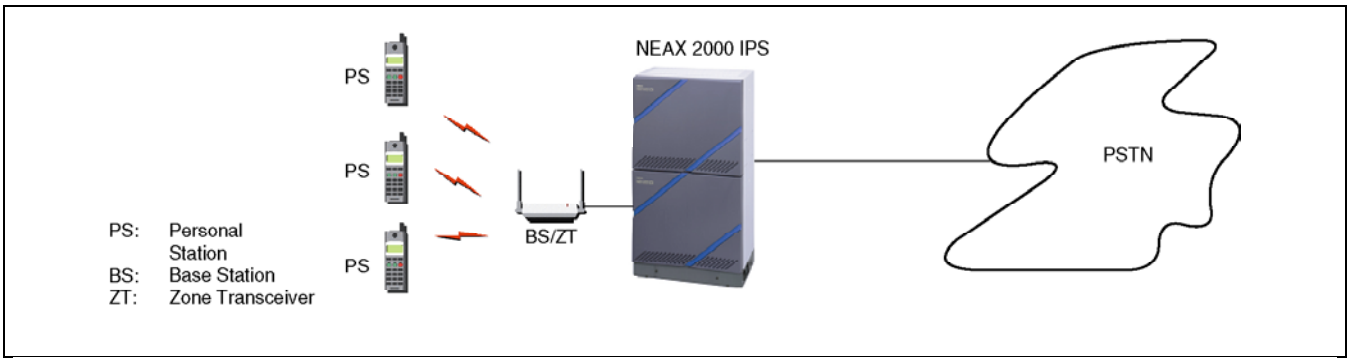

Figure 3-14 System Configuration of Wireless Communications

The wireless communications function conforms to the ARIB standard version 2 RCR STD-28 standarized in Japan as the PHS (Personal Handyphone System) or TIA/EIA-667 PACS WUPE standarized in USA as the unlicensed PCS (Personal Communications System) in accordance with market's regulations.

The PS (Personal Station), BS/ZT (Base Station/Zone Transceiver) and the NEAX 2000 IPS provide wireless communications service on the private use.

Personal Handyphone System (PHS)

◆ Personal Station (PS)

The PS (Personal Station) incorporates the 32 Kbps ADPCM encoding technique and privacy function so that you can talk about even important matters in a noise-free, very clear voice.

Since the PS is light-weight and compact in size, it can conveniently carried around.

Here are specifications for the PS and its major functions.

Specification of Personal Station

Table 3-3 PHS Personal Station (PS) Specifications

Item	Specifications
Frequency	1.895 ~ 1.918 GHz (*)
RF Power	10mW (Average)
Voice Coding/Decoding System	32 Kbps ADPCM
Basic Specifications	Compliance with ARIB Standard RCR STD-28 version 2
Continuous Talk Time	Approx. 6 Hours
Continuous Standby Time	Approx. 500 Hours
Waterproof	Supported
Dimensions	Approx. 40 (W) × 24 (D) × 130 (H) mm (Excluding Antenna)
Volume	Approx. 105 cc
Weight	Approx. 115 g

* It may differ from each country based on its regulation.

Feature

<< Display/Indication >>
- 24-Digits Capacity (for Dialing and Storage)
- 11-Characters × 2-Lines Large Display + Indicator
- Battery Indicator
- Receiving Signal Strength Indicator
- Own Telephone Number Display
- Out of Area Indicator
- Softkey Display
- 2-Line Operation (L1 & L2)

<< Calling >>
- Incoming Call Indicator
- DTMF Dialing
- Vibrator Alert
- Automatic Answer

<< Memory >>
- Directory Dial (100 numbers with name)
- Speed Dial (20 numbers with name)
- Last Number Redial (10 numbers)
- Calling Party Number (10 numbers)
- Scrolling by Name on Memory Location

<< General >>
- Back Lighting
- Low Battery Alarm
- Volume Control (ringing tone, earpierce)
- Voice Mail Indication (VMI)
- Lock Function
- Name Display

◆ Cell Station (CS)

Because of its small size, light weight and slenderness, the CS can be installed anywhere...the wall surface, the ceiling or behind the ceiling. In addition, its expansion or relocation can be smoothly performed.

Followings are the specifications for the CS.

Specification of Cell Station

Table 3-4 2-Wired (U-Interface) Cell Station (CS) Specifications

Item	Specifications
Radio Interface	RCR STD-28 Ver. 2 (RF Power : 10mW Average)
PBX Interface	2-Wire (metallic)
Maximum Simultaneous Access per CS	3 Personal Stations
Volume	Approx. 700 cc
Size	Approx. 141 (W) × 183 (D) × 36 (H) mm (Excluding Antenna)
Weight	Approx. 380 g
Power Supply	▪ PBX Power Supply (DC-48V) ▪ Local Power Supply (AC 100V/200V)
Application	In Door Type

* This CS can download new soft program from MAT, so it can easily maintenance and operation.

2-Wired Cell Station (CS)
(U-Interface)

Personal Station (PS)

Figure 3-15 Cell Station (CS) and PHS Personal Station (PS)

Personal Communication System (PCS)

◆ Personal Station (PS)

The PS (Personal Station) incorporates the 32 Kbps ADPCM encoding technique and privacy function so that you can talk about even important matters in a noise-free, very clear voice.

Since the PS is light-weight and compact in size, it can conveniently carried around.

Here are specifications for the PS and its major functions.

Specification of Personal Station

Table 3-5 PCS Personal Station (PS) Specifications

Item	Specifications
Frequency	1.920 ~ 1.930 GHz
RF Power	6.8 mW (Average)
Voice Coding/Decoding System	32 Kbps ADPCM
Basic Specifications	Compliance with TIA/EIA-667 PACS WUPE
Continuous Talk Time	Approx. 6 Hours
Continuous Standby Time	Approx. 500 Hours
Waterproof	Supported
Dimensions	Approx. 40 (W) × 24 (D) × 130 (H) mm (Excluding Antenna)
Volume	Approx. 105 cc
Weight	Approx. 115 g

Feature

<< Display/Indication >>
- 24-Digits Capacity (for Dialing and Storage)
- 11-Characters × 2-Lines Large Display + Indicator
- Battery Indicator
- Receiving Signal Strength Indicator
- Own Telephone Number Display
- Out of Area Indicator
- Voice mail indication
- Softkey Display
- 2-Line Operation (L1 & L2)

<< Calling >>
- Incoming Call Indicator
- DTMF Dialing
- Vibrator
- Alert
- Automatic Answer

<< Memory >>
- Directory Dial (100 numbers with name)
- Speed Dial (20 numbers with name)
- Last Number Redial (5 numbers)
- Calling Party Number (5 numbers)
- Scrolling by Name on Memory Location

<< General >>
- Back Lighting
- Low Battery Alarm
- Volume Control (ringing tone, earpierce)
- Lock Function
- Voice Mail Indication (VMI)
- Wireless roaming
- Name Display

◆ Zone Transceiver (ZT)

Because of its small size, light weight and slenderness, the ZT can be installed anywhere...the wall surface, the ceiling or behind the ceiling. In addition, its expansion or relocation can be smoothly performed.

Followings are the specifications for the ZT.

Specification of Zone Transceiver (ZT)

Table 3-6 Zone Transceiver (ZT) Specifications

Item	Specifications
	▪ **2 Wire Zone Tranceiver (U-I/F)**
Radio Interface	TIA/EIA-667 PACS WUPE (RF Power : 6.8mW Average)
PBX Interface	2-Wire (metallic)
Maximum Simultaneous Access per ZT	3 Personal Stations
Volume	Approx. 560 cc
Size	Approx. 160 (W) × 139 (D) × 40 (H)mm (Excluding Antenna)
Weight	Approx. 400 g
Power Supply	▪ PBX Power Supply (DC-48V) ▪ Local Power Supply (AC 100V/200V)
Application	In Door Type/Outdoor Box (Option)

2-Wired Zone Transceiver (ZT)
(U-Interface)

Personal Station (PS)

Figure 3-16 Zone Transceiver (ZT) and PCS Personal Station (PS)

D^term Softphone (SP30)

This D^term Softphone provides the D^term IP features without the telephone set, and it works on the Windows PC connected to LAN network. You click the button on the picture, the button, lamp and LCD works like an actual telephone. In addition to making and answering calls operation, D^term SP30 provides call logs for all incoming and outgoing calls the user has made or received, and a recording of live conversation.
D^term SP30 also provides telephone directory integration. Users can dial one of four ways:

- Manual entry
- Drag and Drop numbers displayed in the contact book within MS Outlook
- Copy and Paste numbers displayed in Excel and/or the contact book within MS Outlook
- Using any PC telephony directory which can be linked via the API (DDE) interface of the D^term SP30 Softphone

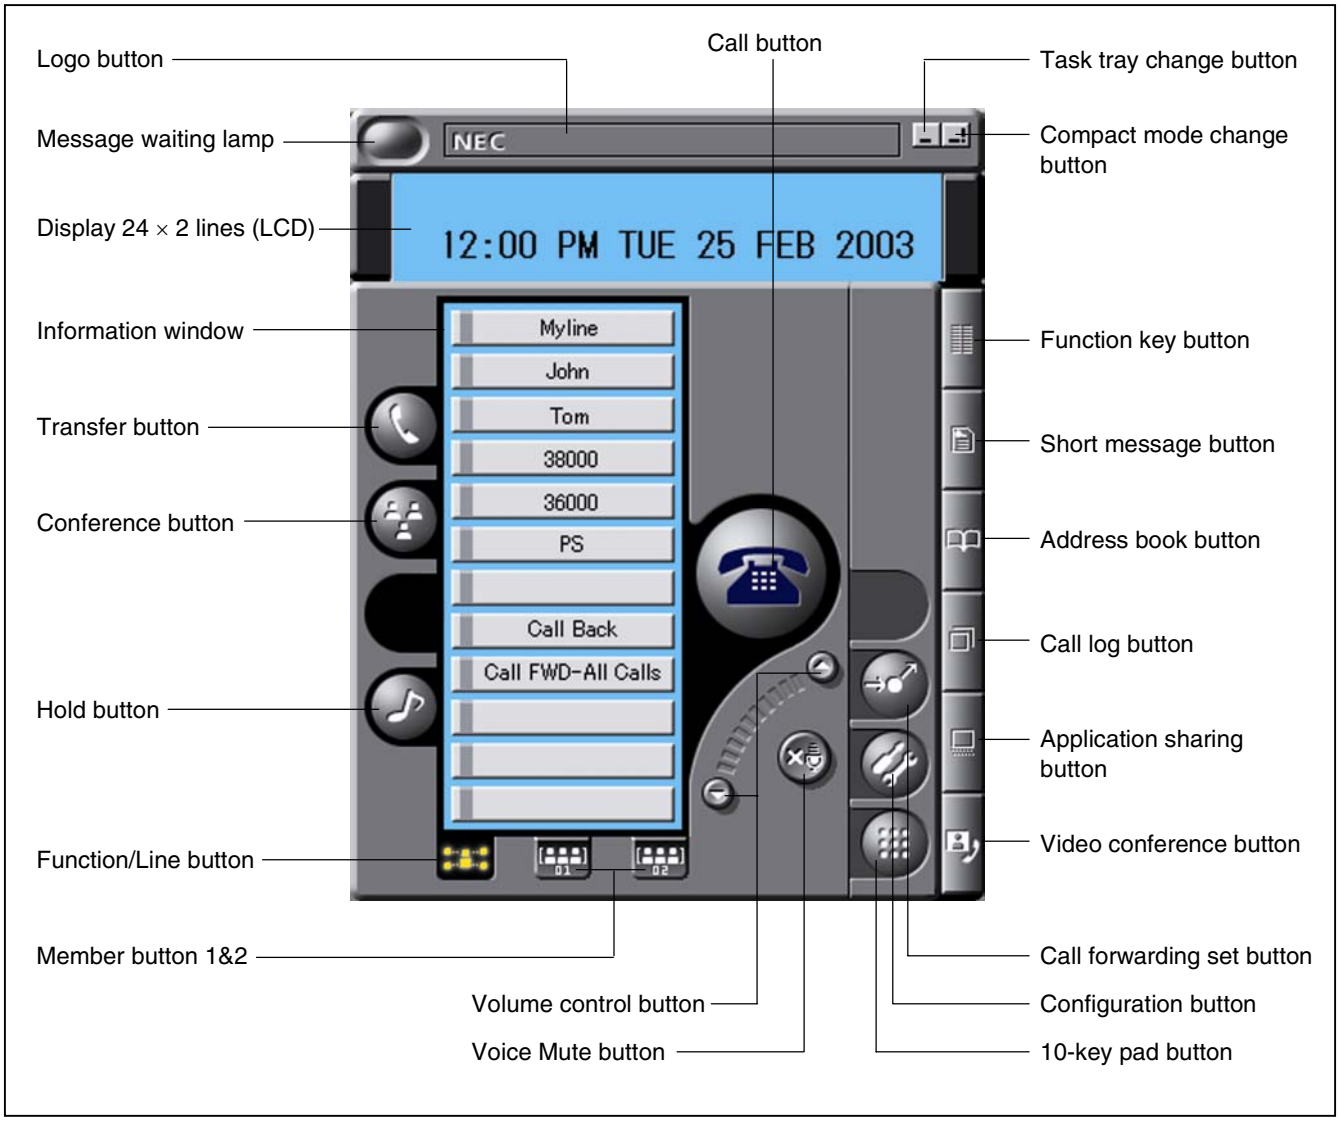

Figure 3-17 SP30 Screen

Subpanels and Functions

Function Key Panel
Displays lines and functions set for PBX and enables changing of button name and pop-up.

Short Message Log Panel
Displays transmission, reception and error logs of simple messages and lets user select a log to telephone or reply to a sender.

Call Forward Settings Panel
For setting or cancelling Call Forwarding-All Calls/Busy Line/ Don't Answer/ Log Out for PBX.

Call Log Panel
A user can see origination and termination types, times, telephone numbers, conversation times, and speech memos; then save them in CSV-format file. Select a log for origination/termination, speech memo input, or deletion.

Configuration Panel
For setting origination rules, termination actions, voices, video conference actions, simple message actions, the number of logs, user names, automatic log in, and other convenient functions.

Video Conference Panel
Using cameras in conjunction with this panel, you can see video of calling party in the upper panel and yourself in the lower panel.

Video Conference Panel

Application Sharing Panel
For application sharing and white board functions.

10-Key Keypad Panel
Can be used like the dial pad of a telephone.

Requirements

Operating Environment

PC	IBM/PC-AT compatible machine
OS	WindowsXP/2000
Memory	256MB or more
PCU	Pentium III 800MHz or more
HDD	10MB or more in unused memory
Audio device	USB handset (optional)
PBX-compatible	NEAX 2400 IPX (FP8700-R14 or later)
	NEAX 2000 IPS (FP3300-R8 or later)

IP Relation

LAN interface	10M/100M Ethernet
Transport protocol	Voice RTP
	Signal UDP/TCP
Setting of IP address	DHCP setting/Station setting
QoS	TOC, IP Precedence, Diffserve
Payload cycle	20ms/30ms/40ms
Voice encoding	G.711 (64k), G.723.1, G.729a

CHAPTER 4 OVERVIEW OF INSTALLATION AND MAINTENANCE

Installation

Installation of Main Equipment

The installation of the NEAX 2000 IPS is comprised of up to 8 Port Interface Modules (PIMs). A PIM provides 13 card slot for Common Control, Line/Trunk (LT), and Application Porcessors (AP) cards. It also houses an AC/DC Power Supply, DC/DC Power Supply (for -48V), and batteries for protection from short-term (about 30 minutes) power interruption.

Cabling inside the unit, between the switching equipment and the MDF, can all be done by plug-and-jack connections, while printed circuit cards can easily be plugged into the edge connectors. On all installations, a special provision for plug-and-jack connections completely eliminates possible errors in wiring. This allows the installation to be done easily and smoothly.

System Data Entry

There are two methods for data entry, using a Customer Administration Terminal (CAT) or a Maintenance Administration Terminal (MAT).

CAT
Any D^{term} can be assigned as a CAT through programming. The D^{term} can still be used as a regular telephone when it is not in CAT mode.

MAT
The Maintenance Administration Terminal (MAT) is a personal computer that connects to the PBX using MATWorX software. MATWorX is a Windows-based software application that lets you program and configure any NEAX PBX from your computer. It is a framework or platform wherein PBX maintenance software (add-ins) resides. Its graphical user interface (GUI) makes it easier for you to manage and configure your PBX's features.

Maintenance

Trouble Reporting and Diagnosis

The urgency of a fault is indicated by the MJ/MN lamp provided on the Power Card and optional external alarm indicator.

System Administration

System data, which varies from installation to installation and which is subject to continual change during service, is readily entered or changed from the D^{term} or MAT (Maintenance Administration Terminal).
The system data can be downloaded to, or uploaded from, a floppy disk in the MAT computer.

Remote Maintenance

Access to the NEAX 2000 IPS, for the purpose of system diagnosis, status reporting, and database reconfiguration, can be performed from remote locations (e.g., Maintenance Centers, Technical Assistance Service Centers, etc.). By taking advantage of the built-in modem on the NEAX 2000 IPS CPU, the following maintenance administration functions can be accomplished by a remotely located MAT via a modem over a central office network or a tie line network.

- System Data Correction/Upload/Download
- MP/FP Software Upgrade
- Control of Battery Disconnection
- Display of Line/Trunk Connections
- Detection of open or short circuit in the line cables for both analog and D^{term} telephones
- Fault Message Display

CHAPTER 5 SPECIFICATIONS

System Capacity

The following table shows the system capacity.

Table 5-1 System Capacity (Single MP System)

Item		System Capacity Note 1, 2							
		1PIM	2PIM	3PIM	4PIM	5PIM	6PIM	7PIM	8PIM
LT Card	(No. of Ports)	64	128	192	256	320	384	448	512
	(No. of Cards)	12	24	36	48	60	72	84	96
AP Card	(No. of Ports)	Max. 256 ports per system							
	(No. of Cards)	12	24						
Total Number of Lines (Analog Single Line Tel. + D^{term})		64	128	192	256	320	384	448	512
IP PAD	(No. of Channel) Note 9	64 (2 cards)		128 (4 cards)		192 (6 cards)		256 (8 cards)	
Analog Single Line Telephone (Lines)	Standard	64	128	192	256	320	384	448	512
	Long Note 5	48	96	144	192	240	288	336	384
D^{term} (Lines)	Standard	64	128	192	256	320	384	448	512
	Long	24	48	72	96	120	144	168	192
D^{term} IP/ D^{term} IP INASET/ D^{term} SP30 (Peer-to-Peer Connection)		956	892	828	764	700	636	572	508
D^{term} PS (Australia/Asia) / D^{term} PSII/III (USA/LA)		512 Note 6							
WLAN Handset (MH210/MH220)		64							
D^{term} PS + WLAN Handset		512							
Cell Station (CS) / Zone Transceiver (ZT)		16	32	48	64	80	96	112	128
IP - BS (PHS)		128 Note 7							
ISDN Station		16	32	48	64	80	96	112	128
Central Office Trunk (Lines)	Loop Start	64	128	192	256	256	256	256	256
	DID w/4DIT	48	96	144	192	240	256	256	256
Tie Line Trunk (Lines)	4LDT	48	96	144	192	240	256	256	256
	2W E&M	24	48	72	96	120	144	168	192
	4W E&M	24	48	72	96	120	144	168	192
CCIS Trunk (Peer-to-Peer Connection) Note 10		Max. 127							
DTI/CCIS Digital Link Note 1	1.5M-AMI	DTI : 10, CCIS : 8							
	2M-AMI	Max. 8 Links per system							
ISDN	1.5M/2M-AMI (PRT)	8							
	2BRT (card)	12	24						
	4BRT (card)	6	12	18	24	24	24	24	24
IP Trunk Note 3		1	2	3	4	5	6	7	8
PFT Connections	8PFT	8	16	24	32	40	48	56	64
3-Party Conference		Max. 16 conference groups per system							
6/10-Party Conference	6-Party	Max. 4 conference groups per system							
	10-Party	Max. 2 conference groups per system							
32-Party Conference		Max. 8 conference groups per system							

Table 5-1 System Capacity (Single MP System) (Cont'd)

Item	System Capacity							
	1PIM	2PIM	3PIM	4PIM	5PIM	6PIM	7PIM	8PIM
DTMF Sender	Max. 32 circuits per system							
DTMF Receiver	16		32					
SN716 Desk Console	8							
SN708 Digital Console (Australia) (Production discontinued)	8							
SN709/712/741 Smart Console (Production discontinued)	8							
Attendant Terminal (D^{term} ATT Position)	Max. 8 sets per system							
SMDR Interface	Max. 2 interface ports per system (RS - 232C) Max. 1 port per system (IP)							
PMS Interface	Max. 1 interface port per system (RS - 232C or IP)							
ACD / MIS or OAI Interface **Note 4**	Max. 1 interface port per system (IP)							
Remote PIM over IP (Number of Sites)	20 (depending on network configurations)							
DID Dial Conversion	1000							
Call Forwarding-Outside Set	496							
Authorization Code / Forced Account Code / Remote Access to System (DISA) Code	3000							
Message Reminder Set	1024							
Name Display / Guest Name Display	512							
Speed Calling-Station (Station Speed Dial) Set	10000							
MP built-in SMDR Call Record	1024							

Note 1: *The total number of trunk line and DTI channel shall be 256 or less. (Each trunk line and DTI channel are required to assign the "Trunk Number" by system data programming and maximum number of system parameter for "Trunk Number" is 256.)*

Note 2: *"PIM" in this table means "Physical PIM."*

Note 3: *Maximum voice channels per IP trunk card depends on the payload size as follows (payload size can be assigned by system data programming):*

32IPLA+16VCTA

Payload Size	Maximum Voice Channels per IP PAD (32IPLA+16VCTA)		
	G.711	G.729a	G.723.1
10ms	12	12	-
20ms	20	20	-
30ms	30	30	24
40ms	32	32	-

8IPLA+24IPLA

Payload Size	Maximum Voice Channels per IP PAD (8IPLA+24IPLA)		
	G.711	G.729a	G.723.1
10ms	20	20	-
20ms	32	32	-
30ms	32	32	24
40ms	32	32	-

Table 5-1 System Capacity (Single MP System) (Cont'd)

Note 4: *Message Waiting Lamp is not available when the 4LLC is mounted in slot 08 to 10.*

Note 5: *From FP 3300, maximum 256 PS can be accommodated to the system in addition to the maximum 512 LT ports.*

Ex: 400 Dterms + 100 CO Lines=500 LT Ports
150 PSs } *Total 650 Ports available*

Note 6: *Total number of CS and IP-BS should be 128 or less.*

Note 7: *Maximum voice channels per IP trunk card depends on the payload size as follows (payload size can be assigned by system data programming):*

- *CCIS (p-p/p-mp) and Peer-to-Peer*

Payload Size	G.729a	G.711	G.723.1
10 ms	4 Channel	4 Channel	------
20 ms	8 Channel	8 Channel	------
30 ms	16 Channel	16 Channel	16 Channel
40 ms	16 Channel	16 Channel	------

- *VoIP (H.323)*

Payload Size	G.729a	G.711	G.723.1
20 ms	6 Channel	5 Channel	---
30 ms	8 Channel	7 Channel	8 Channel
40 ms	12 Channel	10 Channel	---

Note 8: *It is possible to connect 4 applications at the same time.*

IP Specifications

Table 5-2 IP Specifications

ITEM		SPECIFICATIONS	REMARKS
Voice Encoding		G.729a G.723.1 (5.3 k/6.3 k) G.711	8 kbps CS-ACELP MP-MLQ/ACELP 64 Kbps PCM
IP PAD		8/32 channels per card Automatically seized per call	
FAX Communication Feature		FAX Relay Method (T.30)	G3 FAX (up to 14.4 Kbps) Super G3 Reciprocal: Not allowed FAX communication with H.323: Not available PN-32IPLA/PN-32IPLA-A (IP PAD) card (PN-8IPLA (IP PAD) card is not available.)
		FAX Relay Method (Path-through (G.711/G.726))	PN-8IPLA (IP PAD) card (PN-32IPLA/PN-32IPLA-A (IP PAD) card is not available.)
DTMF Signal		H.245	H.323 IPT/IP PAD/D^{term}IP
Inter-office/Intra-office Signaling		H.245	D^{term}IP-to-D^{term}IP connection D^{term}IP-to-IP PAD connection
		PROTIMS over IP	D^{term}IP-to-2000 IPS connection
		CCIS over IP	Point-to-Multipoint connection
		H.323	H.323 IPT/4VCT card and IP PAD card are required
Jitter Control		Dynamic Jitter Buffer	
Quality of Service (QoS)		▪ TOS, IP Precedence ▪ DiffServ	
LAN Interface		10BASE-T/100BASE-TX	Auto Negotiation is available. 100BASE-TX is recommended.
Echo Canceller (IP PAD)		G.168 (64 ms)	
Payload Size	D^{term} IP/ CCIS Virtual IPT (32IPLA + 16VCT)	10 ms. -40 ms. (G.723.1: 30 ms. fixed) **Note**	Max. voice channels per card G.729a / G.711 / G.723.1 10 ms: 12 ch / 12 ch / - 20 ms: 20 ch / 20 ch / - 30 ms: 30 ch / 30 ch / 24 ch 40 ms: 32 ch / 32 ch / -
	D^{term} IP/ CCIS Virtual IPT (8IPLA + 24IPLA)	10 ms. -40 ms. (G.723.1: 30 ms. fixed)	Max. voice channels per card G.729a / G.711 / G.723.1 10 ms: 20 ch / 20 ch / - 20 ms: 32 ch / 32 ch / - 30 ms: 32 ch / 32 ch / 24 ch 40 ms: 32 ch / 32 ch / -
	H.323 IPT	20 ms.-40 ms. (10 ms. increments) (G.723.1: 30 ms. fixed)	Max. voice channels per card G.729a / G.711 / G.723.1 20 ms: 6 ch / 5 ch / - 30 ms: 8 ch / 7 ch / 8 ch 40 ms: 12 ch / 10 ch / -

Table 5-2 IP Specifications (Cont'd)

ITEM	SPECIFICATIONS	REMARKS
PAD Control	0 dB to +16 dB (+2 dB increments) 0 dB to –16 dB (–2 dB increments) When using PN-8IPLA (IP PAD): 0 dB to +14dB (+2 dB increments) 0 dB to –14 dB (–2 dB increments)	Setting is available per Location No. For connection between D^{term}IPs
	0 dB to –16 dB (For North America) 0 dB to –12 dB (For other than North America)	For connection via the IPT card

Note: *When no 16VCT card is mounted, the CODEC type is fixed to G.711 and the payload size is fixed to 40 ms.*

Line Conditions

Table 5-3 Line Conditions

DESCRIPTION		SPECIFICATIONS
Loop Resistance (including Telephone Set)		
▪ Analog Standard Line		Max. 600 ohms
▪ Analog Long Line		Max. 2,500 ohms (DP 10pps), Max.1,700 ohms (DP 20pps) Max. 1,200 ohms (DTMF)
Loop Resistance (including Opposite End Resistance)		
▪ Central Office trunk		Max. 1,700 ohms
▪ Tie Line Trunk (Loop Dial) **Note 3**		Max. 2,500 ohms
▪ Tie Line Trunk (E&M)		Max. 900 ohms (only E - wire condition)
Cable Length Note 1		
▪ SN709/712/741 Smart Console (Production discontinued)		
	8DLC/4DLC Card	Max. 150 meters
	2DLC Card	Max. 600 meters
▪ SN716 Desk Console		
	8DLC/4DLC 2DLC Card	Max. 350 meters (Max. 300 meters for 8DLC card)
	4DLC Card with AC adapter	Max. 1,200 meters
▪ D^{term} 75 (Production discontinued)		
	8DLC/4DLC Card (-27V)	Max. 200 meters (Max. 300 meters for D^{term} 8 and D^{term} 8D)
	4DLC/2DLC Card (-48V)	Max. 850 meters
	4DLC/2DLC Card with AC adapter	Max. 1,200 meters
▪ D^{term} Series i		
	8DLC/4DLC Card (-27V)	Max. 200 meters (Max. 300 meters for D^{term} 8/8D and D^{term} 16D/16LD)
	4DLC/2DLC Card (-48V)	Max. 850 meters
	4DLC/2DLC Card with AC Adapter	Max. 1,200 meters
▪ DSS/BLF Console		
	4DLC/2DLC Card with AC Adapter	Max. 1,200 meters (Max. 300 meters for 8DLC Card)
▪ Cell Station **Note 3**		
	BS21A (for S-Interface)	Max. 900 meters @-43V
	BS21A with AC Adapter	Max. 960 meters @-43V
	BS31 (for U-Interface)	Max. 800 meters (2-wire), Max. 1,600 meters (4-wire) @-43V **Note 2**
	BS31A with AC Adapter	Max. 5,000 meters
▪ Zone Transceiver (for Latin America)		
	ZTII-S (for S-Interface)	Max. 1,219 meters @-48V, Max. 975 meters @-45V
	ZTII-S with AC Adapter	Max. 1,341 meters @-48V
	ZTII-U (for U-Interface)	Max. 1,219 meters (2-wire), Max. 2,103 meters (4-wire) @-48V **Note 2** Max. 975 meters (2-wire), Max. 1,706 meters (4-wire) @-45V
	ZTII-U with AC Adapter	Max. 3,958 meters

Note 1: *Cable length is based on cable with 0.5 mm diameter and without lightning arresters.*

Note 2: *Retrofit system applies following conditions:*

BS31 (for U-Interface)	*Max. 600 meters (2-wire), Max. 1,200 meters (4-wire) @-43V*
ZTII-U (for U-Interface)	*Max. 880 meters (2-wire), Max. 1,520 meters (4-wire) @-43V*

Note 3: *This feature is not available for UK.*

Cell Station/Zone Transceiver Line Conditions

Table 5-4 Cell Station/Zone Transceiver Line Conditions

▪ DESRIPTION		▪ SPECIFICATIONS
Cell Station		
	BS31 (for U-Interface)	Max. 800 meters (2-wire), Max. 1,600 meters (4-wire) @-43V **Note**
	BS31 with AC Adapter	Max. 5,000 meters
Zone Transceiver (for Latin America)		
	ZTII-S (for S-Interface)	Max. 1,219 meters @-48V, Max. 975 meters @-45V
	ZTII-S with AC Adapter	Max. 1,341 meters @-48V
	ZTII-U (for U-Interface)	Max. 1,219 meters (2-wire), Max. 2,103 meters (4-wire) @-48V **Note** Max. 975 meters (2-wire), Max. 1,706 meters (4-wire) @-45V
	ZTII-U with AC Adapter	Max. 3,958 meters

Note: *Cable length is based on cable with 0.5 mm diameter and without lightning arresters.*

Traffic Capacity

Table 5-5 Traffic Capacity

Number of PIMs	1PIM	2PIM	3PIM	4PIM	5PIM	6PIM	7PIM	8PIM
Traffic Capacity	Max. 2500 BHCA		Max. 5000 BHCA **Note**		Max. 7500 BHCA **Note**		Max. 8000 BHCA **Note**	

Note: *The traffic load of each FP shall be 2500 BHCA or less.*

DRS (Device Registration Server)

Table 5-6 DRS (Device Registration Server)-System Based

Features of Built-in DRS		Description	Remarks
Max Registration Terminal		512/MP	
Log-in	Login without password	Not Available	Use blank as a password
	Authentication by DRS-Network Based	Not Available	
	Authentication by DRS-System Based	Available	
	Authentication by MAC Address	Available	
	Confirmation when overriding	Available	
Log-out	Dialing Log-out feature access code	Available	
	Function key	Available	
	Soft key	Available	
DHCP	Inter-working with DHCP server	Available	

Dimension and Weight

Table 5-7 Dimension and Weight

DESCRIPTION	SPECIFICATIONS	
	DIMENSIONS (W × D × H; mm)	WEIGHT (kg)
Main Equipment		
▪ PIM (Fully card-mounted)	Approx. 430 × 223 × 353	Approx. 11.5
▪ BASE	Approx. 430 × 205.2 × 61.6	Approx. 3.0
▪ BASE TRAY (for UL)	Approx. 435 × 224.6 × 66.2	Approx. 1.7
D^{term} 75 Series		
▪ D^{term} 8	Approx. 177 × 224 × 76	Approx. 1.0
▪ D^{term} 8D	Approx. 177 × 229 × 98	Approx. 1.1
▪ D^{term} 16D	Approx. 177 × 229 × 98	Approx. 1.1
▪ D^{term} 32D	Approx. 201 × 229 × 98	Approx. 1.1
▪ DSS Console	Approx. 177 × 218 × 74	Approx. 0.7
D^{term} Series i		
▪ D^{term} 2DT	Approx. 165 × 221 × 92	Approx. 0.9
▪ D^{term} 4D	Approx. 215 × 193 × 142	Approx. 0.9
▪ D^{term} 8	Approx. 231 × 217 × 106	Approx. 1.1
▪ D^{term} 8D	Approx. 231 × 217 × 106	Approx. 1.2
▪ D^{term} 16D	Approx. 231 × 217 × 106	Approx. 1.2
▪ D^{term} 16LD	Approx. 232 × 252 × 106	Approx. 1.35
▪ D^{term} 32D	Approx. 232 × 243 × 106	Approx. 1.3
▪ DSS Console	Approx. 175 × 216.3 × 92	Approx. 0.6
D^{term} Series i (Russian display model)		
▪ D^{term} 8D-R	Approx. 175 × 226 × 96	Approx. 0.8
▪ D^{term} 16D-R	Approx. 175 × 226 × 96	Approx. 0.8
▪ D^{term} 32D-R	Approx. 193 × 226 × 96	Approx. 0.9
Attendant Console		
▪ SN709/712/741 Smart Console (Production discontinued)	Approx. 264 × 230 × 110	Approx. 1.3
▪ SN716 Desk Console	Approx. 277 × 258 × 132	Approx. 1.4

Operating Environment

Table 5-8 Operating Environment

DESCRIPTION	SPECIFICATIONS
Ambient Temperature	0 to 40 °C
Relative Humidity	Max. 90 % (non-condensing)